

Index

- Aberration, 4, 6
- Aberration coefficient, 6, 9
- Aberration generator, 105, 127
- Aberrated wavefront, 4
- Adaptive optics, 137
- Adaptive Optics Associates, 94
- Airborne Laser Lab (ALL), 21, 60, 82, 99
- Airy disk, 5, 29, 151
- Aperture stop, 12
- Artificial stars, 146
- Astigmatism, 8, 130
- Astigmatism test, 116
- Astronomy, 139, 145
- Axial irradiance or intensity, 151

- Back focal length, 11
- Battlefield environment, 160
- Beam angle sensor (BAS), 49
- Beam jitter, 38, 97
- Beam sampling, 22

- Calibration, 105, 128, 133
- Chief ray, 11
- Collimator, 106
- Color, 22
- Coma, 8, 132
- COSTAR, 94
- Crossed grating, 79, 132
- Crossed grating wavefront sensor, 79
- Curvature sensor, 155

- Deformable mirror, 137
- Diffraction, 5, 9
- Distortion, 7
- Dynalectron Corp., 99

- Effective focal length, 11
- Entrance pupil, 12
- Error subtraction, 118, 129, 134
- Exit pupil, 12

- Far-field Irradiance, 55, 149, 159
- F-number, 5
- Fizeau interferometer, 107
- Focal length, 11
- Focus error, 41
- Focus sensors, 41
- Focus test, 113
- Foucault focus sensor, 48
- Foucault knife edge, 42
- Fourier optics, 10

- Global tilt, 13, 109
- Grating, 75
- Grating rhomb, 22
- Grating, rotating, 81, 144


- Hartmann test, 89
- High-energy laser, 21, 147
- Hole plate, 24
- Hubble Space Telescope, 58, 94

- Infrared presensitization photography, 63, 160
- Image compensation, 139
- Intensity, 157
- Interferometer, 53, 54, 70, 107
- Interference, 29, 83
- Interference equation, 65, 71
- Interferogram, 51, 74, 109, 117, 129, 135
- IR PDI, 60
- Itek, 79, 81

- Keck Telescope, 27
- Knife edge test, 42, 67
- Knife edge wavefront sensor, 69

- Large Integrated Telescope Experiment (LITE), 62
- Laser Beacon, 146
- Lateral shear interferometry, 70, 74
- Laser wavefront analyser (LWA), 82

- Lenslet array, 93
- Local wavefront tilt, 16, 113
- Marginal ray, 11
- MIRACL Laser, 21, 82, 92, 101
- Multiple Mirror Telescope (MMT), 28
- Multipurpose Multiple Telescope Testbed (MMTT), 38
- Near-field irradiance, 97
- Optical phased arrays, 27
- Optical path difference (OPD), 6
- Optical path length (OPL), 2
- Parallel plate, 70, 109
- Perfect optical imaging, 4
- Perkin-Elmer, 82
- PHASAR, 30
- Phasefront, 2
- Phased array, optical, 27
- Phase conjugate, 137
- Phase fluctuation monitor, 92
- Phase retrieval, 159
- Pinhole camera, 1
- Piston, 27
- Pointing, 27, 38, 109
- Point diffraction interferometer (PDI), 54
- PDI wavefront sensor, 56, 132
- Point spread function, 5, 152
- Polarization, 36
- Position sensitive detector, 38, 89, 93, 95, 109
- Principle plane, 11
- Pupil shear, 70, 77
- Ray, 1
- Ray misidentification, 121
- Radial shear interferometer, 53
- Real Time Atmospheric Compensation (RTAC), 143
- Real Time Shearing Interferometer (RTSI), 79
- Reference sphere, 6, 55, 129, 134
- Repeatability, 119
- Ronchi grating, 75, 77
- Rotating grating wavefront sensor, 81
- Sag, 41
- Scanning knife edge wavefront sensor, 69, 131
- Scanning Hartman wavefront sensor (SHAPE), 95, 99, 108
- Shack-Hartmann test, 93, 132
- Shack-Hartmann wavefront sensor, 94, 132
- Shear plate, 71
- Seidel aberrations, 7
- Smartt interferometer, 54
- Spherical aberration, 8
- Star image, 151
- Talandic, 69
- Tilt, global, 13
- Tilt, local, 16, 113
- Tilt tests, 109, 113
- Transverse ray aberration, 15, 18, 89, 91, 96
- Visibility, 35
- WaveAlyzer, 74
- Wavefront, 2
- Wavefront compensation, 139
- Wavefront reconstruction, 19
- Wavefront sensor, 10
- Young's experiment, 30, 34, 83
- Zernike polynomial, 7

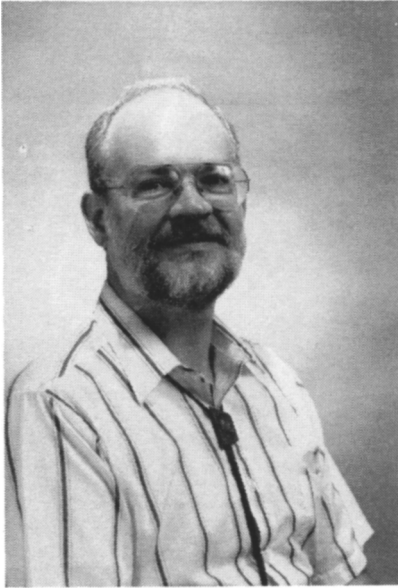

Joseph M. Geary received his BA in physics from LaSalle College in 1966, and his MS and PhD degrees, both in optics, from the University of Arizona's Optical Sciences Center in 1975 and 1984, respectively. He has 30 years of broad-based experience in optics. Dr. Geary spent 18 years in government service. This includes eight years in aerial reconnaissance at the Naval Air Development Center (Warminster, Pennsylvania; 2 years in medical imaging at the Bureau of Radiological Health (Rockville, Maryland; 8 years in high-energy lasers (specifically the Airborne Laser Lab) at the Air Force Weapons Laboratory (Albuquerque, NM).

After leaving government service, Dr. Geary was with United Technologies Optical Systems, where he worked on advanced optical metrology and HEL beam diagnostics (for the MIRACL laser). In 1991 he joined Swales Aerospace (Beltsville, Maryland) to become manager of their optics group. This group primarily supported spaceborne optical instrumentation for Goddard Space Flight Center. In 1996 Dr. Geary joined the senior research staff of the Center for Applied Optics at the University of Alabama in Huntsville where he also holds an appointment as a research professor. His principal activities are in optical metrology and testing, and optical design.

Dr. Geary has authored over 40 papers in refereed journals, has written 2 books, and holds 10 patents. He is a member of SPIE.